


Bearings are magnetic Distances in metres Elevations in feet AMSL Coordinates WGS84	TWR 120.600	APRON			AD ELEV 11	APRON ELEV 13	LIEE	CAGLIARI / ELMAS	
		Lighting	Bearing strength	Stands: 08 - 22 wide body (code F) 05 - 09 - 11 - 12 - 14 - 26 - 28 code D 16 - 20 code E Apron 194,407 sq m					
		Edge : NIL	Surface : NIL						
			Strength: PCN 60/R/B/W/T						
						POINTS ON PARKING AREA			

01	39° 15' 11.27"	009° 03' 29.33"	24	39° 15' 05.95"	009° 03' 37.88"
02	39° 15' 14.83"	009° 03' 23.96"	25	39° 15' 09.83"	009° 03' 34.98"
03	39° 15' 15.64"	009° 03' 25.28"	26	39° 15' 06.10"	009° 03' 40.39"
04	39° 15' 15.54"	009° 03' 25.84"	27	39° 15' 10.64"	009° 03' 36.31"
05	39° 15' 12.00"	009° 03' 30.45"	28	39° 15' 07.01"	009° 03' 39.62"
06	39° 15' 16.99"	009° 03' 27.32"	30	39° 15' 02.01"	009° 03' 32.37"
07	39° 15' 12.90"	009° 03' 32.07"	31	39° 15' 00.79"	009° 03' 33.79"
08	39° 15' 12.96"	009° 03' 32.86"	32	39° 14' 59.57"	009° 03' 35.21"
09	39° 15' 18.32"	009° 03' 28.45"	33	39° 14' 58.30"	009° 03' 36.58"
10	39° 15' 17.04"	009° 03' 29.32"	34	39° 14' 57.08"	009° 03' 38.00"
11	39° 15' 13.91"	009° 03' 33.58"	35	39° 14' 55.85"	009° 03' 39.41"
12	39° 15' 19.40"	009° 03' 30.05"	36	39° 14' 54.67"	009° 03' 40.89"
121	39° 15' 19.64"	009° 03' 29.95"	50	39° 14' 56.47"	009° 03' 46.01"
122	39° 15' 19.18"	009° 03' 30.41"	51	39° 14' 55.69"	009° 03' 46.63"
123	39° 15' 18.72"	009° 03' 30.87"	52	39° 14' 56.70"	009° 03' 46.51"
124	39° 15' 18.26"	009° 03' 31.33"	53	39° 14' 55.93"	009° 03' 47.12"
14	39° 15' 10.67"	009° 03' 30.16"	54	39° 14' 56.94"	009° 03' 47.01"
15	39° 15' 09.22"	009° 03' 31.49"	55	39° 14' 56.17"	009° 03' 47.62"
16	39° 15' 08.72"	009° 03' 32.51"	56	39° 14' 57.18"	009° 03' 47.50"
20	39° 15' 04.02"	009° 03' 37.50"	57	39° 14' 56.41"	009° 03' 48.12"
21	39° 15' 09.02"	009° 03' 33.66"	60	39° 14' 54.65"	009° 03' 47.61"
22	39° 15' 04.35"	009° 03' 38.87"	61	39° 14' 54.99"	009° 03' 47.10"
23	39° 15' 05.26"	009° 03' 38.94"	62	39° 14' 55.30"	009° 03' 48.31"

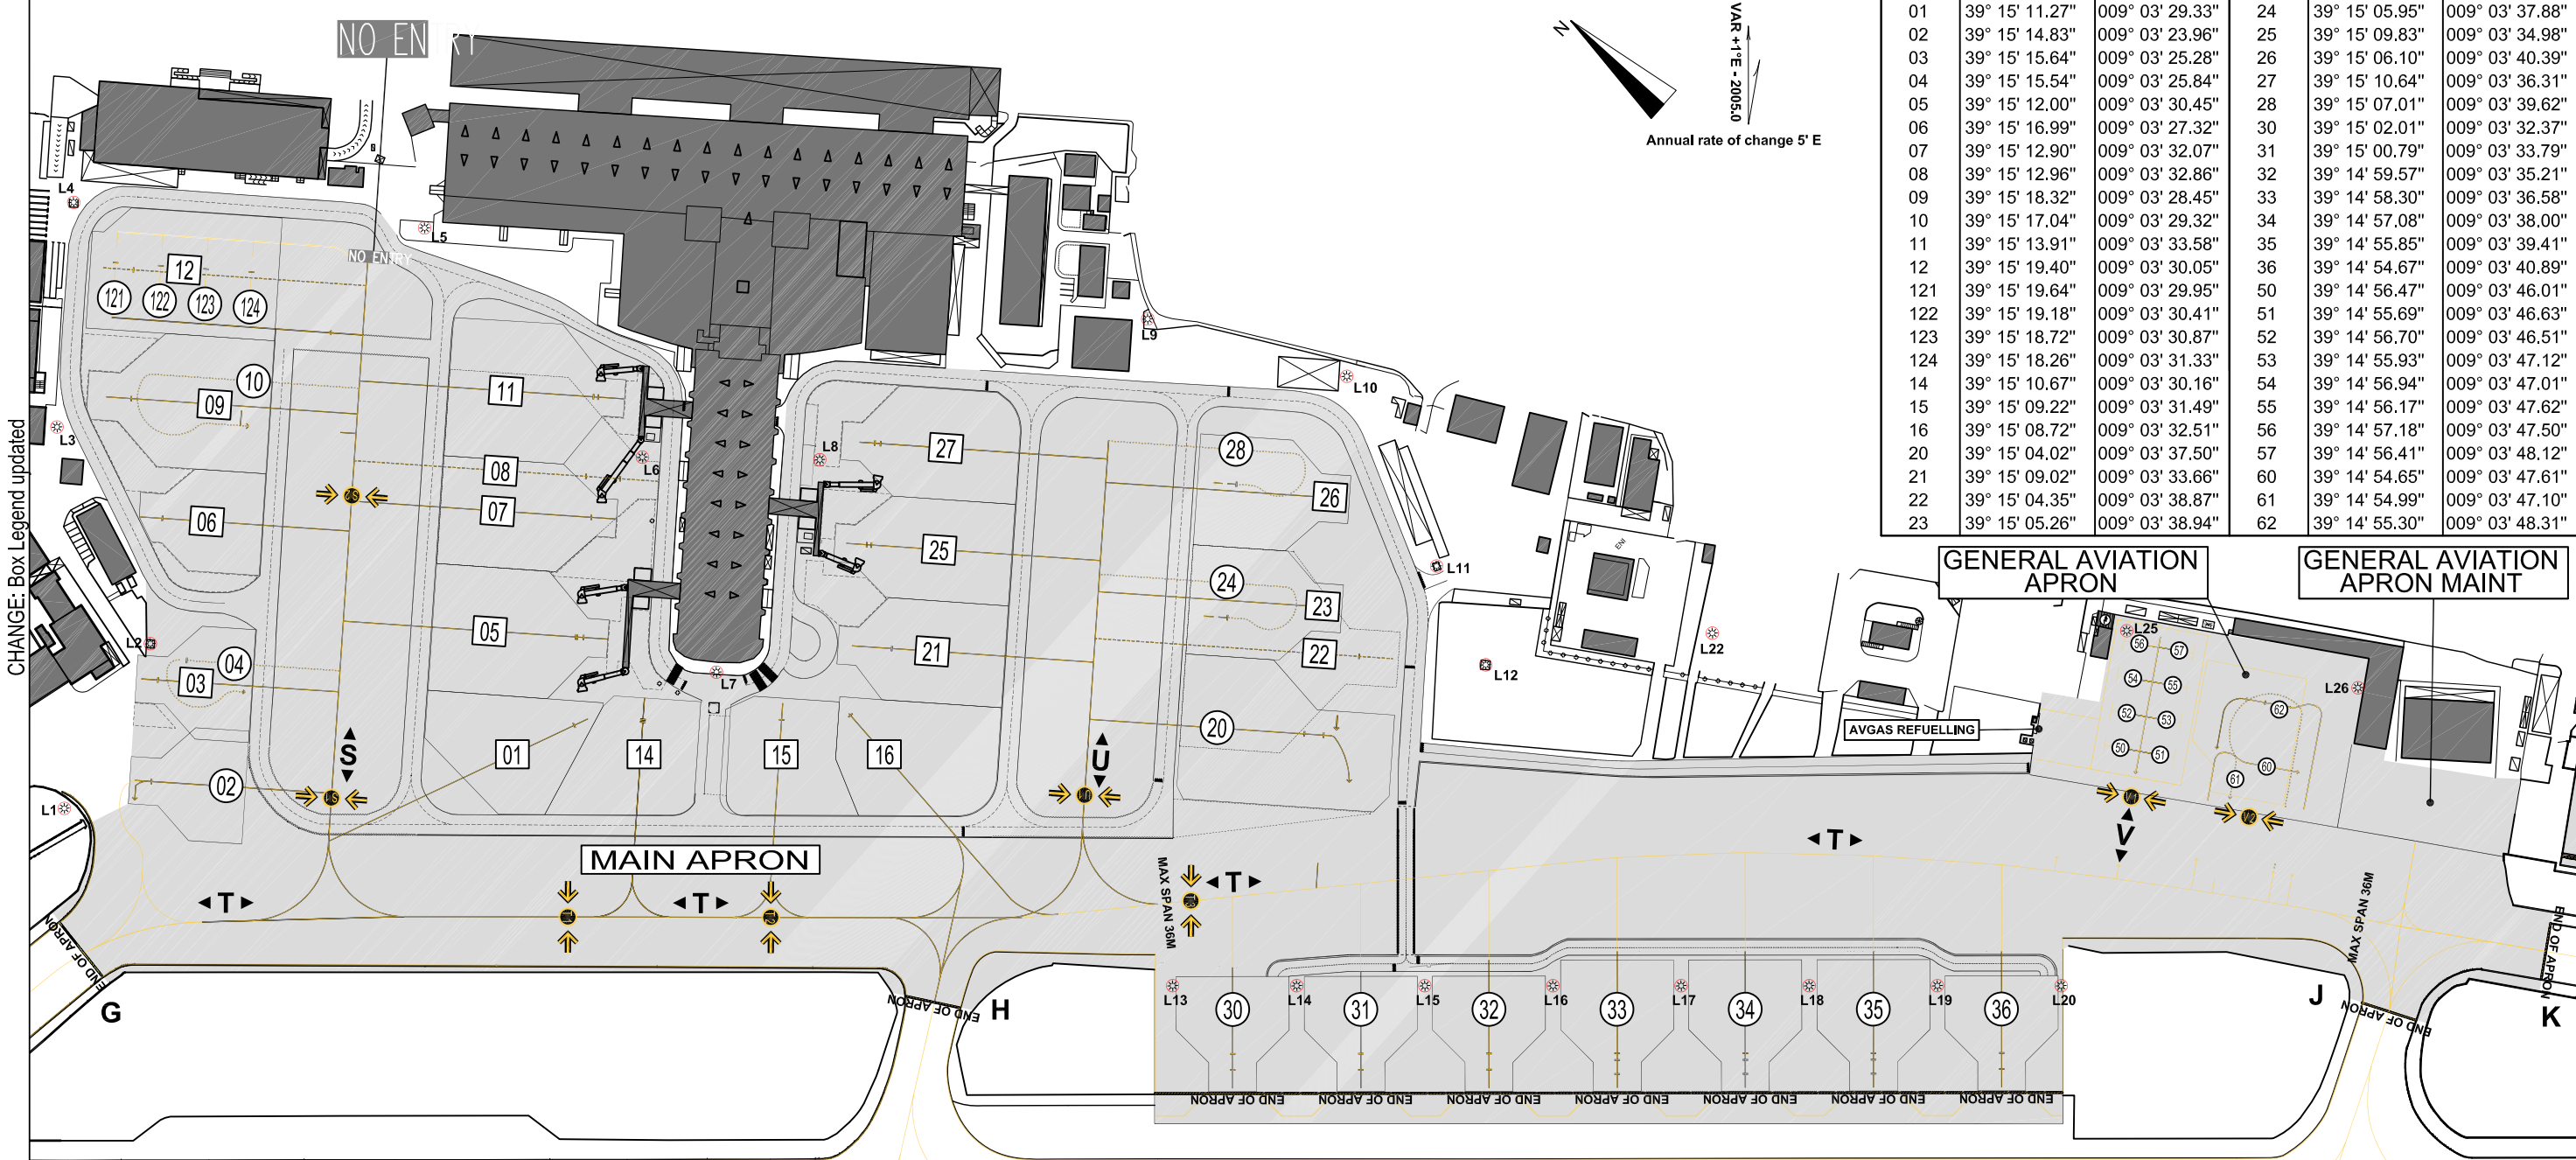

TAXILANE IDENT	RMK	TAXILANE IDENT	RMK	TAXILANE IDENT	RMK
T	1: From TWY G "END OF APRON" marking to intersection Taxilane "U" (included) max wing span restricted to code "D"	S	From taxilane T to stands: 01,02,03,04,05,06,07,08,09,10,11,12,121,122,123,124	U	From taxilane T to stands: 20,21,22,23,24,25,26,27,28
	2: From intersection Taxilane "U" (excluded) to "END OF APRON" marking (beginning of TWY "K") Max wing span restricted to Code "C"			V	Max wing span 11 metres

- REMARKS:
- 1) Visual docking guidance system (Safe Gate)
AVBL for stands: 01, 05, 07, 08, 11, 25, 27
 - 2) MAX WING SPAN 14 m for stands: 121, 122, 123, 124
MAX WING SPAN 11 m for self manoeuvring stands: 50,51,52,53,54,55,56,57
 - 3) MAX WING SPAN 19 m for stands: 60, 62
 - 4) MAX WING SPAN 30.5 m for stands: 61

LEGEND

- 02 SELF MANOEUVRING
- 01 PUSH BACK
- APRON
- BUILDING
- START ENGINE POINT
- LIGHTING TOWER (LX)