


LEGEND

- TDZ lights
- Reflectors

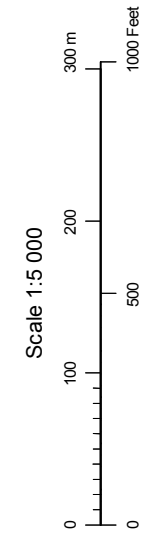

Docking system type	Stands Number
FMT APIS	8-17, 19 -23, 25, 27, 30, 32

STRAIGHT - THROUGH PROCEDURE
 When taxiing on apron CAUTION advised. The Straight Through procedure still remains. The aircraft shall then proceed straight into intersections until the pilot is aligned with the centreline before turning to desired direction or lead-in line to parking position

ARP 573936N 0121728E
 AD ELEV 507 FEET

LEGEND See GEN 2.3
 Dimensions in m, ELEV in ft

TWY A-Z width 23 m, bearing strength PCN 90 F/B/X/T
 TWY centre line lights green
 Lead in lights yellow
 Turning guidance light yellow

TWY B, C, D, E, F, Y: Centreline on exit TWY's within ILS critical/sensitive areas and centerline within 150 m from RWY centerline-alternately green and yellow.

ACL/INS Reference points					GÖTEBORG/Landvetter				
STAND	INS COORD		ELEV ft	PARKING AID	STAND	INS COORD		ELEV ft	PARKING AID
5	574022.88N	0121753.29E	507		34	573949.67N	0121725.11E	503	
5A	574022.12N	0121753.09E	507		36	573948.33N	0121723.90E	505	
6	574021.65N	0121752.17E	507		38	573946.88N	0121723.10E	506	
7	574020.41N	0121751.05E	507		40	573945.52N	0121722.00E	507	
7A	574019.61N	0121750.81E	507		42	574029.16N	0121751.47E	506	
8	574019.26N	0121749.62E	506	APIS	43	574028.77N	0121749.83E	506	
9	574017.97N	0121748.35E	506	APIS	44	574028.47N	0121748.35E	506	
10	574016.46N	0121746.97E	505	APIS	46	574022.99N	0121743.11E	507	
11	574015.05N	0121745.96E	504	APIS	48	574021.34N	0121741.60E	507	
12	574013.58N	0121745.23E	504	APIS	50	574017.29N	0121737.96E	506	
13	574012.07N	0121743.86E	503	APIS	52	574015.60N	0121736.43E	505	
14	574010.83N	0121742.73E	502	APIS	54	574013.09N	0121734.14E	504	
15	574009.44N	0121741.46E	503	APIS	56	574009.81N	0121731.25E	503	
16	574007.76N	0121739.94E	503	APIS	58	574008.44N	0121729.98E	503	
17	574006.30N	0121738.60E	502	APIS	60	574007.06N	0121728.72E	502	
19	574003.80N	0121736.27E	502	APIS	62	574005.68N	0121727.47E	502	
20	574002.00N	0121734.64E	503	APIS	64	574001.83N	0121723.97E	502	
21	574000.23N	0121732.88E	502	APIS	66	573959.86N	0121722.17E	502	
22	573958.42N	0121731.20E	501	APIS	67	573956.38N	0121718.99E	501	
23	573957.02N	0121729.92E	501	APIS	68	573955.36N	0121718.33E	500	
24	573956.60N	0121729.58E	501		70	573954.05N	0121717.15E	501	
25	573955.64N	0121729.24E	501	APIS	72	573952.71N	0121715.93E	503	
26	573954.84N	0121727.97E	501		74	573951.37N	0121714.71E	504	
27	573954.38N	0121728.09E	501	APIS	76	573950.04N	0121713.36E	505	
30	573952.41N	0121727.29E	501	APIS	78	573948.33N	0121711.69E	506	
32	573951.01N	0121726.33E	502	APIS					